

RE-364BS

CONVENTIONAL SOUNDER BASE

General

The RE 364BS range of conventional sounder base are designed to be connected to conventional Fire Alarm Panels. And these conventional sounder base should be connected to the compatible control panel. The RE-364BS conventional sounder base receives their power from NAC terminal of Fire alarm control panel and once fire detected in the zone circuit then NAC output turns on this sounder base. A conventional detector is mounted on the sounder base and it receives power from Zone terminal of Fire alarm control panel.

Features


- Low Standby Current.
- Slim and Sleek.
- 8 Different tone selection by using 4 way DIP Switch.



Specification

	Electrical Specification
<i>Operating Voltage</i>	18 ~ 32 VDC
<i>Operating Current</i>	8 mA
<i>Standby Current</i>	0.5 mA
<i>Sound Level</i>	80 db @ 1m
<i>Sounder Type</i>	Piezo Electric Type
<i>Operating Temperature</i>	0 - 49° C / 32 - 120° F
<i>Storage Temperature</i>	0 - 60° C
<i>Tone Type</i>	8 Different Types
<i>Material</i>	FR ABS
<i>Color</i>	White
<i>Mount Type</i>	Ceiling Mount
<i>Dimensions</i>	120mm Dia (100mm Base mountable)

Wiring Diagram

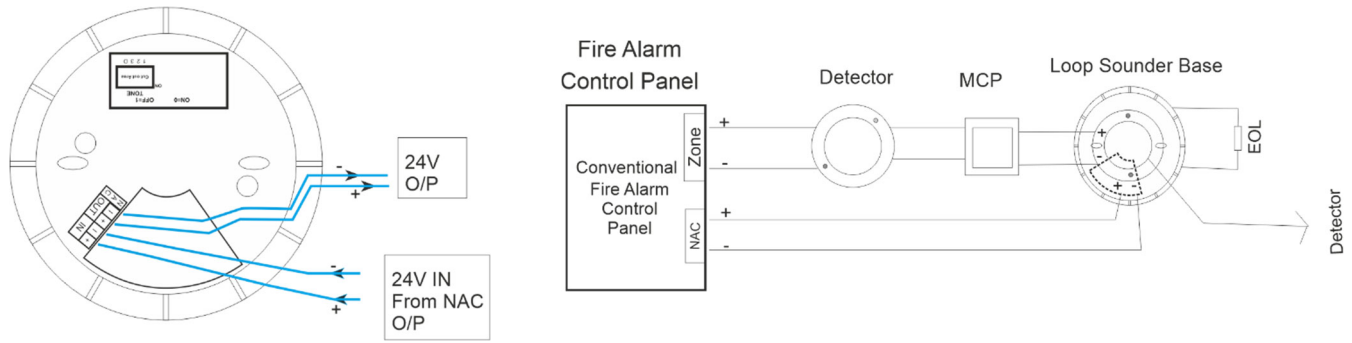

Connect the sounder base to the NAC terminal of a Fire Alarm Control Panel, according to the polarity. The wiring Terminal accepts solid or stranded cables up to mm².

Tone Selection Chart

Tone	Description
1	Dutch sweep tone @ 970 Hz continuous
2	Din Tone 1200Hz falling to 500Hz over 1 sec
3	French Fire Sound 554Hz for 100ms and 440Hz for 400ms
4	Alternative warble BS standard 800/960 Hz @ 2 Hz
5	US temporal pattern HF 2900 Hz for 0.5s on 0.5s off x 3 then 1.5s off
6	Sweep 800-1000 hz @ 0.5 sec
7	Siren high freq sweep 500-1000 in 0.5 sec
8	Siren low freq sweep 500-1000 in 1.5 sec

Compatible Panel

Model	Description
RE-102	2 Zone Conventional Panel
RE-104	4 Zone Conventional Panel
RE-2554	4 Zone Conventional Panel
RE-2558	8 Zone Conventional Panel

Ordering Information

Model	Description
RE-364BS	Conventional Sounder Base

India

RAVEL ELECTRONICS PVT LTD.,
150A, Electronics Industrial Estate,
Perungudi, Chennai – 96, India.
E-mail: marketing@ravelfire.com; Web: www.ravelfire.com

United Kingdom

RAVEL ELECTRONICS LTD.,
Unit 11, Chancel Industrial Estate, Newhall street,
Willenhall WV13 1NX, West Midlands, United Kingdom.
E-mail: info@ravelfire.co.uk; Web: www.ravelfire.co.uk

USA

RAVEL AMERICAS INC.,
2855 NW 112th Ave ST#2 Miami,
Doral, Florida 33172, USA.