

AVANI–RP ANALOGUE ADDRESSABLE FIRE ALARM REPEATER PANEL

General

The Avani-RP repeater panel is a compact remote unit for Ravel-Avani Intelligent analogue addressable fire alarm panel. It repeats all the indications of fire alarm control panel in standalone or in a peer-to-peer network Panel. It has (40X4) 160 character LCD Display. This repeater is connected to Avani control panel using RS 485 communication network. Any communication fault or any loss in communication due to cable fault is indicated in this repeater panel. The display parameters can be selected individually to suit the requirement of each remote area.

Special Features

- Modular Construction, Servicable.
- Networkable.
- User selectable display parameters.

Features

- UL listed (9th Edition).
- 32 bit processor.
- 160 (40X4) character LCD Display.
- 2000 Event with Real Time Clock.
- RS 485 communication for Network / Repeater.
- One form C relay for fire.
- Extensive built in transient protection.
- Lamp test facility.
- Common fire, supervisory, fault LED indication.







PC Specification

Electrical Specification		
Operating Voltage	24VDC	
Quiescent Current	80mA	
Alarm Current	130mA	
Operating Condition	Operating Temperature 0 - 49° C / 32-120° F.	
Operating condition	Relative Humidity 93 \pm 2% RH (non-condensing) at 32 \pm 2° C / 90 \pm 3° F.	
	Baud rate	19200 Baud.
RS 485 (optional)	Connector	RS 485
	Cable Length	1200m (screened cable recommended)
	Туре	Form C
Fire Relays	No of Relays	1
	Relay contact rating	2A @ 30 VDC, 0.5A @ 125 VAC
	Mechanical Specificati	on
Dimensions	(350W X 300H X 90D)mm	
Color	White / Red / Black	
Construction	18 Gauge (1.22 mm) CRCA sheet with powder-coated Finish	
IP Rating	IP50	
Cable Entry	8xø19mm Knockout on top of the cabinet	
	7xø22.25mm Knockout on top of the cabinet	
Weight	5 Kg	


Dimensions




Peer to Peer Network

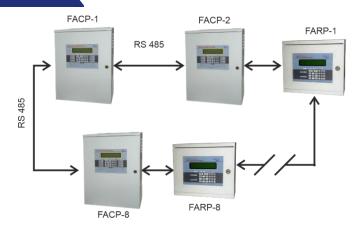

Terminal Details





Compatible Devices

Models	Description
Avani	Analogue Addressable Fire Alarm Control Panel

Ordering Information

Model	Description
Avani-RP W / B / R	Analogue Addressable Fire Alarm Control Panel

India

RAVEL ELECTRONICS PVT LTD., 150A, Electronics Industrial Estate, Perungudi,Chennai – 96, India. E-mail: <u>marketing@ravelfire.com</u>; Web: www.ravelfire.com

*Ravel reserve the right to change the specification without prior notice.

United Kingdom

RAVEL ELECTRONICS LTD.,

Unit 11, Chancel Industrial Estate, Newhall street, Willenhall WV13 1NX, West Midlands, United Kingdom. E-mail: <u>info@ravelfire.co.uk</u>; Web: www.ravelfire.co.uk

USA

RAVEL AMERICAS INC., 2855 NW 112th Ave ST#2 Miami, Doral, Florida 33172, USA.